

Unregulated DC Power Supplies Enclosed Case

Series: UPV

- Low cost DC power; ideal for motors, relays, solenoids, lamps
- 115 VAC input standard; optional 230 VAC input
- Terminal strip for easy wiring
- Perforated cover for efficient cooling
- Optional mounting ears for installation without opening up cover
- Fused AC input
- 2-year warranty



Specifications

Input Voltage:

0-125 VAC (variac not included)
(optional 0-250 VAC), 50-400 Hz

Output Voltage:

See table

Output Current:

See table

Ripple:

See table

Load Regulation:

Nominal output voltage is based on 115 VAC (or 230 VAC) input at approximately 50% of rated current

Line Regulation:

With fixed load, output voltage change is proportional to the input voltage change

Output Voltage Adjustment:

An adjustable autotransformer (not included) can be used to adjust output voltage by varying AC input

Polarity:


Output is floating, either positive or negative terminal may be grounded or floated up to 300V above ground

Ambient Temperature:

-10 to +65 °C, No derating required

Storage Temperature:

-55 to +85 °C

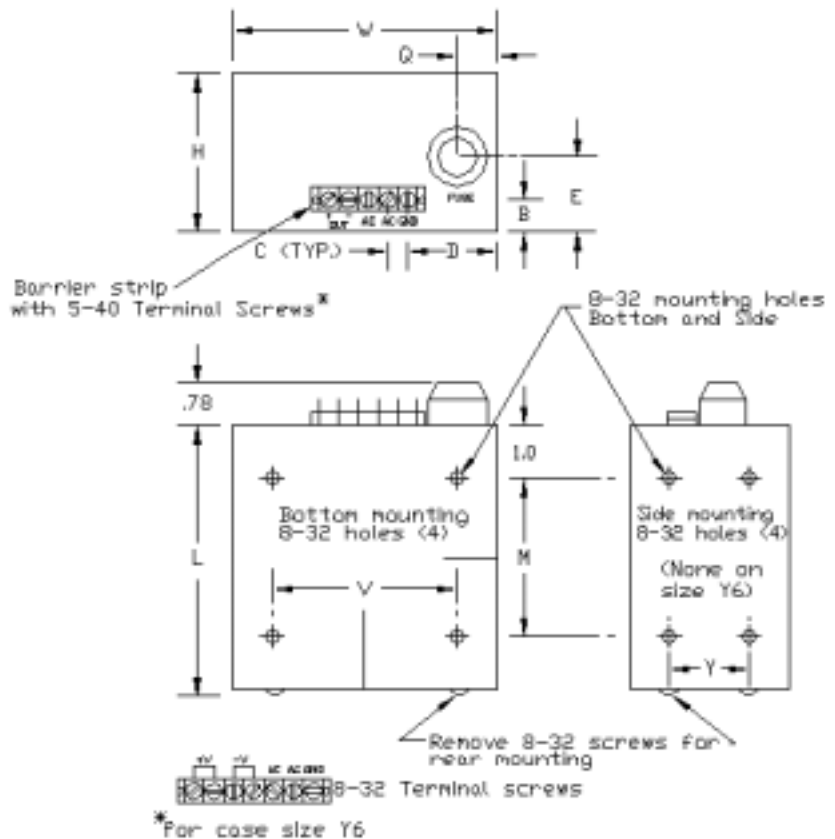

Dimensions												
Size	L	W	H	M	V	Y	Q	E	B	D	C	Lbs.
Y3	3.71	5.12	3.44	1.62	4.5	3	.56	1.37	.75	1.44	.375	3
Y5	5.09	5.12	3.44	3	4.5	3	.56	1.37	.75	1.44	.375	5
Y6	6.59	5.12	3.44	4	4.5	3	.56	1.37	.75	1.44	.375	8