

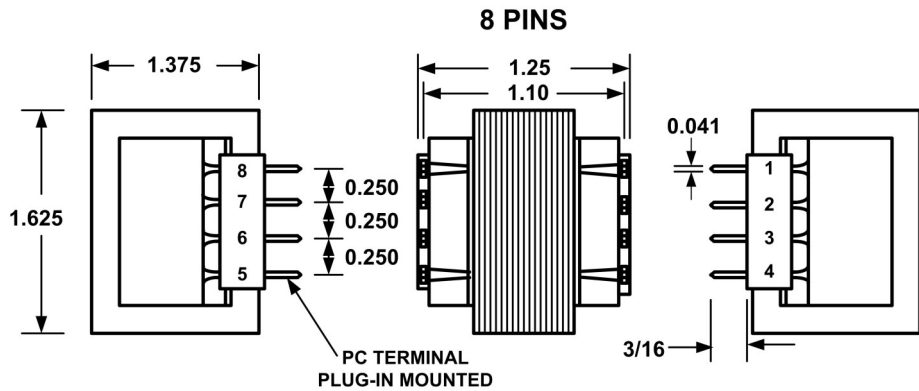


MT & DMT - PRINTED CIRCUIT MOUNT, VERTICAL, POWER TRANSFORMER

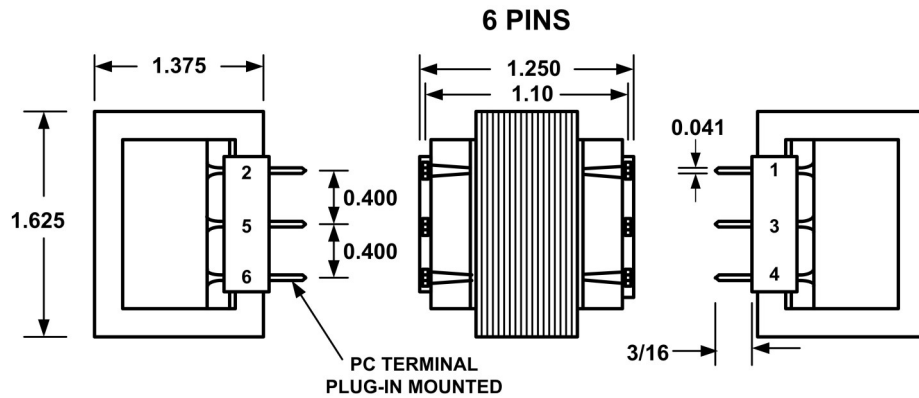


Single Primary
6 Pins

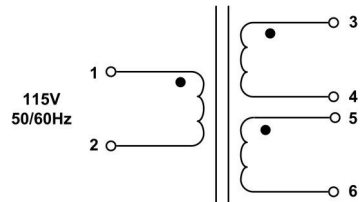

● Indicates Like Polarity

Dual Primary
8 Pins

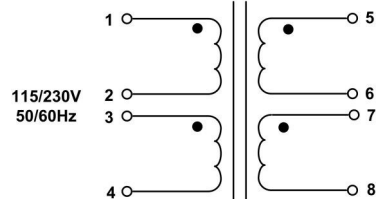

1. Electrical Specifications

- A. Maximum Power: 4.4 VA
- B. Input Voltage and Frequency: 115V & 115/230V @ 50/60Hz
- C. Hi-Pot: 1500 Vrms 1 minute

2. Agency Approval:

UL/cUL 5085-2 Recognized (File E47299)



Part No.			
115V	115/230V	Series Connection	Parallel Connection
MT10-440	DMT10-440	10VCT @ 440MA	5V @ 880MA
MT12-350	DMT12-350	12.6VCT @ 350MA	6.3V @ 700MA
MT16-260	DMT16-260	16VCT @ 260MA	8V @ 520MA
MT20-220	DMT20-220	20VCT @ 220MA	10V @ 440MA
MT24-180	DMT24-180	24VCT @ 180MA	12V @ 360MA
MT28-160	DMT28-160	28VCT @ 160MA	14V @ 320MA
MT34-125	DMT34-125	34VCT @ 125MA	17V @ 250MA
MT40-110	DMT40-110	40VCT @ 110MA	20V @ 220MA
MT56-80	DMT56-80	56VCT @ 80MA	28V @ 160MA
MT120-35	DMT120-35	120VCT @ 35MA	60V @ 70MA
WEIGHT : 5 Oz			



POWER TRANSFORMER

MT10-XXX
DMT10-XXX

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Powervolt Inc.
300 W Factory Road, Addison, IL -60101

Dim: Inches

Sheet 1 of 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH WABASH TRANSFORMER RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING